

MAEDA SEISAKUSHO CO., LTD.

1095 Onbegawa, Shinonoi, Nagano City
Nagano 388-8522, JAPON
TEL +81-(0) 26-292-2228
FAX +81-(0) 26-293-8499
<http://www.maesei.co.jp/english/index.html>



DECLARATION CE DE CONFORMITE DE MACHINE

Le Fabricant

Nom de société: Maeda Seisakusho Co., Ltd.
Adresse: 1095 Onbegawa, Shinonoi, Nagano City
Nagano, 388-8522 JAPON

Le Représentant européen

Nom de société: AB Kranlyft
Adresse: Fibervagen 1 435 33 Molnlycke SUEDE
Tél +46 31 80 70 00

Déclare par la présente que la machine décrite ci-dessous:

Produit: Mini-grue sur chenilles
Modèle: MC405CRME (puissance kW = 21.8)
Serial Number: E0443
Année de Construction: 2016

- Est en conformité avec les directives suivantes:

La directive machines 2006/42/EC
Les deux derniers chiffres de l'année dans laquelle le marquage CE était apposé sont 07

- Est en conformité avec les provisions suivantes

" Directive de basse tension 2006/95/EC "
" Directive CEM 2004/108/EC "
" Directive d'émissions sonores dans l'environnement des matériels destinés à être utilisés
à l'extérieur des bâtiments 2000/14/EC, modifiée par la Directive 2005/88/EC"
- Niveau de puissance acoustique mesuré = 97 dB LWA
- Niveau de puissance acoustique garanti = 101 dB LWA

Et déclare en outre que:

- Les (parties / clauses des) normes harmonisées suivantes ont été appliquées:


EN ISO12100-2:2010	Sécurité des machines - Principes généraux de conception - Evaluation et réduction des risques
EN60204-1:2006	Sécurité des machines - Equipement électrique des machines - Partie 1: Exigences générales
EN13000:2010 (Reference)	Grues - Grues mobiles
EN61000-6-2:2005	Compatibilité électromagnétique (CEM) - Partie 6-2: Normes génériques - Immunité pour les environnements industriels
EN61000-6-4:2007	Compatibilité électromagnétique (CEM) - Partie 6-4: Normes génériques - Emission pour les environnements industriels
EN ISO3744:1995	Acoustique. Détermination de niveaux de puissance acoustique émis par les sources de bruit à partir de la pression acoustique. Méthode d'expertise dans des conditions approchant celles du champ libre sur plan réfléchissant

Place: Nagano, Japon

Date: 16 septembre, 2016


Kazutaka Kitada

Directeur Général / Département machines industrielles
MAEDA SEISAKUSHO CO., LTD.



MAEDA SEISAKUSHO CO., LTD.

1095 Onbegawa, Shinonoi, Nagano City
Nagano 388-8522, JAPON
TEL +81-(0) 26-292-2228
FAX +81-(0) 26-293-8499
<http://www.maesei.co.jp/english/index.html>



DECLARATION CE DE CONFORMITE DE MACHINE

Le Fabricant

Nom de société: Maeda Seisakusho Co., Ltd.
Adresse: 1095 Onbegawa, Shinonoi, Nagano City
Nagano, 388-8522 JAPON

Le Représentant européen

Nom de société: AB Kranlyft
Adresse: Fibervagen 1 435 33 Molnlycke SUEDE
Tél +46 31 80 70 00

Déclare par la présente que la machine décrite ci-dessous:

Produit: Mini-grue sur chenilles
Modèle: MC405CRME (puissance kW = 21.8)
Serial Number: E0443
Année de Construction: 2016

- Est en conformité avec les directives suivantes:

La directive machines 2006/42/EC
Les deux derniers chiffres de l'année dans laquelle le marquage CE était apposé sont 07

- Est en conformité avec les provisions suivantes

" Directive de basse tension 2006/95/EC "
" Directive CEM 2004/108/EC "
" Directive d'émissions sonores dans l'environnement des matériels destinés à être utilisés
à l'extérieur des bâtiments 2000/14/EC, modifiée par la Directive 2005/88/EC"
- Niveau de puissance acoustique mesuré = 97 dB LWA
- Niveau de puissance acoustique garanti = 101 dB LWA

Et déclare en outre que:

- Les (parties / clauses des) normes harmonisées suivantes ont été appliquées:


EN ISO12100-2010	Sécurité des machines - Principes généraux de conception - Evaluation et réduction des risques
EN60204-1:2006	Sécurité des machines - Equipement électrique des machines - Partie 1: Exigences générales
EN13000:2010 (Reference)	Grues - Grues mobiles
EN61000-6-2:2005	Compatibilité électromagnétique (CEM) - Partie 6-2: Normes génériques - Immunité pour les environnements industriels
EN61000-6-4:2007	Compatibilité électromagnétique (CEM) - Partie 6-4: Normes génériques - Emission pour les environnements industriels
EN ISO3744:1995	Acoustique. Détermination de niveaux de puissance acoustique émis par les sources de bruit à partir de la pression acoustique. Méthode d'expertise dans des conditions approchant celles du champ libre sur plan réfléchissant

Place: Nagano, Japon

Date: 16 septembre, 2016


Kazutaka Kitada

Directeur Général / Département machines industrielles
MAEDA SEISAKUSHO CO., LTD.



MAEDA SEISAKUSHO CO., LTD.

1095 Onbegawa, Shinonoi, Nagano City
Nagano 388-8522, JAPAN
TEL +81-(0) 26-292-2228
FAX +81-(0) 26-293-8499
<http://www.maesei.co.jp/english/index.html>



EC DECLARATION OF CONFORMITY OF THE MACHINERY

Manufacturer

Company Name: Maeda Seisakusho Co., Ltd.
Address: 1095 Onbegawa, Shinonoi, Nagano City
Nagano, 388-8522 JAPAN

European Representative

Company Name: Kranlyft UK Ltd.
Address: Unit 1, IO Centre, Cabot Park, Avonmouth, Bristol BS11 0QL England
TEL +44 117 938 7205

Hereby declares that the machine described below:

Product Name: Mini Crawler Crane
Model: MC405CRME (kw rating = 21.8)
Serial Number: E0443
Year of Manufacture: 2016

- is in conformity with the following directives

Machinery Directive 2006/42/EC
The last two digits of the year in which the CE-marking was fixed are 07

- is in conformity with the following provisions

" Low Voltage Directive 2006/95/EC "
" EMC Directive 2004/108/EC "
" Noise emission in the environment by equipment for use outdoors Directive 2000/14/EC,
amended by the Directive 2005/88/EC"
Measured sound power level = 97 dB LWA
Guaranteed sound power level = 101 dB LWA

- And furthermore declares that:

- The following (parts/clauses of) harmonized standards have been applied:

EN ISO12100-2:2010	Safety of machinery – General principles for design – Risk assesment and risk reduction
EN60204-1:2006	Safety of machinery – electrical equipment of machines – Part 1: General requirements
EN13000:2010 (Reference)	Cranes – Mobile cranes
EN61000-6-2:2005	Electromagnetic compatibility (EMC) – Part 6-2: Generic standards – Immunity for industrial environments
EN61000-6-4:2007	Electromagnetic compatibility (EMC) – Part 6-4: Generic standards – Emission for industrial environments
EN ISO3744:1995	Acoustics. Determination of sound power levels of noise sources using sound pressure. Engineering method in an essentially free field over a reflection plane

Place: Nagano, Japan

Date: September 16, 2016

Kazutaka Kitada

Managing Director / Industrial machinery Division
MAEDA SEISAKUSHO CO., LTD.



MAEDA SEISAKUSHO CO., LTD.

1095 Onbegawa, Shinonoi, Nagano City
Nagano 388-8522, JAPAN
TEL +81-(0) 26-292-2228
FAX +81-(0) 26-293-8499
<http://www.maesei.co.jp/english/index.html>



EC DECLARATION OF CONFORMITY OF THE MACHINERY

Manufacturer

Company Name: Maeda Seisakusho Co., Ltd.
Address: 1095 Onbegawa, Shinonoi, Nagano City
Nagano, 388-8522 JAPAN

European Representative

Company Name: Kranlyft UK Ltd.
Address: Unit 1, IO Centre, Cabot Park, Avonmouth, Bristol BS11 0QL England
TEL +44 117 938 7205

Hereby declares that the machine described below:

Product Name: Mini Crawler Crane
Model: Fly jib for MC405C
Serial Number: 0955
Year of Manufacture: 2016

- is in conformity with the following directives
Machinery Directive 2006/42/EC

- is in conformity with the following provisions

“ Low Voltage Directive 2006/95/EC ”

“ EMC Directive 2004/108/EC ”

“ Noise emission in the environment by equipment for use outdoors Directive 2000/14/EC,
amended by the Directive 2005/88/EC ”

- And furthermore declares that:

- The following (parts/clauses of) harmonized standards have been applied:


EN ISO12100-:2010	Safety of machinery – General principles for design – Risk assesment and risk reduction
EN60204-1:2006	Safety of machinery – electrical equipment of machines – Part 1: General requirements
EN13000:2010 (Reference)	Cranes – Mobile cranes
EN61000-6-2:2005	Electromagnetic compatibility (EMC) – Part 6-2: Generic standards – Immunity for industrial environments
EN61000-6-4:2007	Electromagnetic compatibility (EMC) – Part 6-4: Generic standards – Emission for industrial environments
EN ISO3744:1995	Acoustics. Determination of sound power levels of noise sources using sound pressure. Engineering method in an essentially free field over a reflection plane

Place:Nagano, Japan

Date: September 16, 2016

Kazutaka Kitada

Managing Director / Industrial machinery Division
MAEDA SEISAKUSHO CO., LTD.



MAEDA

MAEDA SEISAKUSHO CO., LTD.

1095 Shinonoi Onbegawa, Nagano City

Nagano 388-8522, JAPAN

TEL +81-(0) 26-292-2228

FAX +81-(0) 26-293-5590

TO WHOM IT MAY CONCERN:

Certificate of Test and Inspection

Single fall Hook Block for fly jib

Manufacturer: MAEDA SEISAKUSHO CO., LTD.

Model for: MC405C

Hook Block No. : 6701

We hereby certify that this hook block has been tested and inspected in accordance with the quality standard of our company and we guarantee the quality of this product.

Hook Block Ass'y:

Part No. 584-2200400

Drawing No. 584-4587200

Specifications:

Refer to the attached document for details

Safe Working Load:

1.48 t

Actual value (Internal diameter):

70 mm

Date of Test and Inspection:


September 16, 2016

Signed on behalf of MAEDA SEISAKUSHO CO., LTD.:

Seiichi Yamaguchi

General manager / Quality Assurance Division

MAEDA SEISAKUSHO CO., LTD.



MAEDA

MAEDA SEISAKUSHO CO., LTD.

1095 Shinonoi Onbegawa, Nagano City
Nagano 388-8522, JAPAN
TEL +81-(0) 26-292-2228
FAX +81-(0) 26-293-8499

TO WHOM IT MAY CONCERN:

Certificate of Test and Inspection


4-Fall/2-Fall, 3 Sheave Hook Block
Manufacturer: MAEDA SEISAKUSHO CO., LTD.
Model for: MC405CRME
Hook Block No. : M6804

We hereby certify that this hook block has been tested and inspected in accordance with the quality standard of our company and we guarantee the quality of this product.

Hook Block Ass'y:	Part No. 104-1142100
	Drawing No. 104-4561800
Specifications:	Refer to the attached document for details
Safe Working Load:	3,800 kg
Sheave rope diameter:	8 mm
Actual value (Internal diameter):	80 mm
Date of Test and Inspection:	September 16, 2016

Signed on behalf of MAEDA SEISAKUSHO CO., LTD.:

Seiichi Yamaguchi
General manager / Quality Assurance Division
MAEDA SEISAKUSHO CO., LTD.



MAEDA

MAEDA SEISAKUSHO CO., LTD.

1095 Onbegawa Shinonoi, Nagano City
Nagano 388-8522, JAPAN
TEL +81-(0) 26-292-2228
FAX +81-(0) 26-293-8499

CERTIFICATE FOR LOAD TEST

We herewith confirm that following model:

MC104CER	LC383M-5
MC174CRM	LC785M-6B
MC285CRM	LC785M-8B
MC285CRME	LC1385M-8B
MC285CGRM-2	MK1033CW-1
MC285CRM-2	MK1033CWH-1
MC285CRME-2	MK1033CWE-1
MC305CRM-2	MK1033CWEH-1
MC305CRME-2	CC1485S-1
MC405CRM	
MC405CRME	

Have been test-lifted with 1.25 times the rated total load at our factory.

We also confirm that the group of classification of the mechanism as a whole is M3
and type of crane is A1 in accordance with ISO 4301-2 (JIS B 8822-1).

Place: Nagano, Japan
Date: 27, November, 2015


Tomiaki Habasaki
Managing Director / Industrial machinery Division
MAEDA SEISAKUSHO CO., LTD.

Certificate number KB -191



CERTIFICATE OF TEST AND THOROUGH EXAMINATION OF CRANE

Name and address of owner of crane:	Kranlyft-group , Fibervagen 1, 435 33 Molnlycke , Sweden
Name and address of maker of crane:	Maeda Seisakusho Co., Ltd.
Type of crane and nature of power.	Hydraulic tracked diesel engined and electric motor telescopic crane, Model MC405CRME
Date of manufacture of crane.	2016
IDENTIFICATION NUMBER:	(a)Maker's serial number: E - 0443 (b)Owner's distinguishing Mark or number (if any): not registered
Make and type of automatic safe load Make and type of derricking interlock , if required:	TOYO CONTROL CO., LTD. , AD395 N/A
Date of last previous test of crane:	New machine
Date of last previous thorough examination of crane:	New machine
Safe working load or loads:	See attached sheets 1 to 4
In the case of a crane with a derricking jib or jibs the max. radius at which the jib or jibs may be worked (in feet):	See attached sheets 1 to 4
Defects noted and alterations or repairs required before crane is put into service:	None. None.

I hereby certify that the crane described in this certificate was tested and thoroughly examined on 16 / Sep / 16 and that the above particulars are correct.

Signature: [Signature] Shinohara Qualification Engineer

Name and address of person , company or association by whom
The person conducting the test and examination is employed. Maeda Seisakusho Co., Ltd.
1095 Onbegawa , Shinonoi ,
Nagano city , Nagano prefecture
388-8522 , Japan

Date of certificate: 16 / Sep / 16

For notes see overleaf.

MAEDA MC405CRME

CERTIFICATE No.KB-191

CERTIFICATE OF TEST AND THOROUGH EXAMINATION OF CRANE				PAGE 1	
• Safe working load or loads.	LENGTH OF JIB (METRES)	RADIUS (METRES)	ANGLE °	TEST LOAD KG	SAFE WORKING LOAD KG
In the case of a crane with a	7.695 m boom	2.7		4788	3830
variable operating radius (including	1,1+2 boom	3.5		NIL	3030
a crane with a derricking jib or with	Outriggers are	4.0		NIL	2580
interchangeable jibs of different	maximum	5.0		NIL	2030
lengths) the safe working load at	position	6.0		NIL	1680
various radii of the jib , jibs,		7.0		NIL	1380
or crab must be given. Test loads at		7.25		NIL	1330
various radii should be given in					
column (IV) and in the case of a					
safe working load which has been					
calculated without the application of					
a test load "NIL" should be entered					
in that column .					
•In the case of a crane with a					
derricking jib or jibs the maximum					
radius at which the jib or jibs may					
be worked is : 7.25m					
•We herewith confirm that we test lift all our manufactured cranes individually with					
1.25 times the rated load before delivering .					
•We also confirm that the group of classification of the mechanism as a whole is M3					
(for hoist) and type of crane is A1 in accordance with JIS B 8822-1 (ISO 4301-2).					
•I hereby certify that the crane described in this certificate was tested and thoroughly					
examined on 16 Sep 74 and that the above particulars are correct .					
MAEDA SEISAKUSHO CO., LTD.					
TEL : +81-(0)26-292-2304 FAX : +81-(0)26-293-8768					

DATE OF CERTIFICATE : 11/25/00

SIGNATURE

Shinohara. ENGINEER

SERIAL NO: E- 1443

MAEDA MC405CRME

CERTIFICATE No.KB-191

CERTIFICATE OF TEST AND THOROUGH EXAMINATION OF CRANE				PAGE 2	
• Safe working load or loads.	LENGTH OF JIB (METRES)	RADIUS (METRES)	ANGLE °	TEST LOAD KG	SAFE WORKING LOAD KG
In the case of a crane with a	10.655 m boom	3.5		NIL	3030
variable operating radius (including	1+2+3 boom	4.0		NIL	2580
a crane with a derricking jib or with	Outriggers are	5.0		NIL	2030
interchangeable jibs of different	maximum	6.0		2100	1680
lengths) the safe working load at	position	7.0		NIL	1380
various radii of the jib , jibs,		8.0		NIL	1130
or crab must be given. Test loads at		9.0		NIL	880
various radii should be given in		10.2		NIL	580
column (IV) and in the case of a					
safe working load which has been					
calculated without the application of					
a test load "NIL" should be entered					
in that column .					
•In the case of a crane with a					
derricking jib or jibs the maximum					
radius at which the jib or jibs may					
be worked is : 10.2m					
•We herewith confirm that we test lift all our manufactured cranes individually with					
1.25 times the rated load before delivering .					
•We also confirm that the group of classification of the mechanism as a whole is M3					
(for hoist) and type of crane is A1 in accordance with JIS B 8822-1 (ISO 4301-2).					
•I hereby certify that the crane described in this certificate was tested and thoroughly					
examined on 16/09/16 and that the above particulars are correct .					
MAEDA SEISAKUSHO CO., LTD.					
TEL : +81-(0)26-292-2304 FAX : +81-(0)26-293-8768					

DATE OF CERTIFICATE : 16/09/16

SIGNATURE



Shinohara, ENGINEER

SERIAL NO: E- 095

MAEDA MC405CRME

CERTIFICATE No.KB-191

CERTIFICATE OF TEST AND THOROUGH EXAMINATION OF CRANE				PAGE 3	
• Safe working load or loads.	LENGTH OF JIB	RADIUS	ANGLE	TEST LOAD	SAFE WORKING LOAD
	(METRES)	(METRES)	°	KG	KG
In the case of a crane with a	13.565 m boom	4.0		2788	2230
variable operating radius (including	1+2+3+4 boom	4.5		NIL	1930
a crane with a derricking jib or with	Outriggers are	5.0		NIL	1730
interchangeable jibs of different	maximum	6.0		NIL	1400
lengths) the safe working load at	position	7.0		NIL	1180
various radii of the jib , jibs,		8.0		NIL	1030
or crab must be given. Test loads at		9.0		NIL	930
various radii should be given in		10.0		NIL	830
column (IV) and in the case of a		11.0		NIL	690
safe working load which has been		12.0		NIL	530
calculated without the application of		13.1		NIL	430
a test load “NIL” should be entered					
in that column .					
•In the case of a crane with a					
derricking jib or jibs the maximum					
radius at which the jib or jibs may					
be worked is : 13.1m					

DATE OF CERTIFICATE 16 / Nov / 11

SIGNATURE

Shinohara, ENGINEER

SERIAL NO: E- 443

MAEDA MC405CRME

CERTIFICATE No.KB-191

CERTIFICATE OF TEST AND THOROUGH EXAMINATION OF CRANE				PAGE 4	
*Safe working load or loads.	LENGTH OF JIB (METRES)	RADIUS (METRES)	ANGLE °	TEST LOAD KG	SAFE WORKING LOAD KG
In the case of a crane with a	16.475 m boom	5.0		NIL	1130
variable operating radius (including	1+2+3+4+5 boom	5.5		1225	980
a crane with a derricking jib or with	Outriggers are	6.0		NIL	910
interchangeable jibs of different	maximum	7.0		NIL	760
lengths) the safe working load at	position	8.0		NIL	650
various radii of the jib , jibs,		9.0		NIL	600
or crab must be given. Test loads at		10.0		NIL	550
various radii should be given in		11.0		NIL	490
column (IV) and in the case of a		12.0		NIL	440
safe working load which has been		13.0		NIL	380
calculated without the application of		14.0		NIL	320
a test load "NIL" should be entered		15.0		NIL	260
in that column .		16.0		NIL	210
*In the case of a crane with a					
derricking jib or jibs the maximum					
radius at which the jib or jibs may					
be worked is : 16.0m					
*We herewith confirm that we test lift all our manufactured cranes individually with					
1.25 times the rated load before delivering .					
*We also confirm that the group of classification of the mechanism as a whole is M3					
(for hoist) and type of crane is A1 in accordance with JIS B 8822-1 (ISO 4301-2).					
*I hereby certify that the crane described in this certificate was tested and thoroughly					
examined on 16 / Sep / 16 and that the above particulars are correct .					
MAEDA SEISAKUSHO CO., LTD.					
TEL : +81-(0)26-292-2304 FAX : +81-(0)26-293-8768					

DATE OF CERTIFICATE : 16 / Sep / 16

SIGNATURE



Shinohara, ENGINEER

Strength Calculation of Single Fall Hook

Revised


Established Feb. 12. 2009

Material and tensile strength of single Fall hook:


Material: S45C-N (Tempered)

Tensile strength: $\sigma_B = 569 \text{ N/mm}^2$

1. Strength calculation of cross section A-A:



Sectional area: $A = 1105 \text{ mm}^2$
 Section modulus: $Z_{\text{maximum}} = 5920 \text{ mm}^3$
 Section modulus: $Z_{\text{tension}} = 8330 \text{ mm}^3$

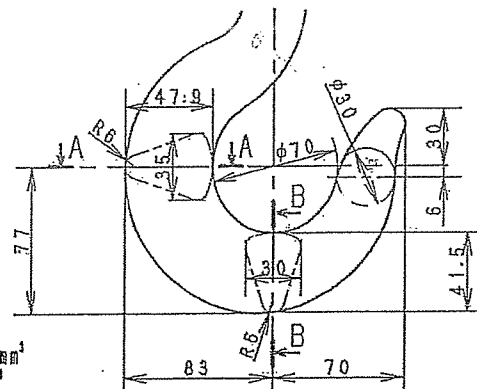

Tensile stress σ_A of the section A-A is,

$$\sigma_A = (W \times R_A / Z_A + W / A_A) \times 9.80665$$

where, W is rated load

R_A is distance from load application line to centroid of section A-A

A_A is sectional area section A-A

Z_A is section modulus on tension side of section A-A

1480 kg

54.9 mm


1105 mm²

8330 mm³

$$\sigma_A = (1480 \text{ kg} \times 54.9 \text{ mm} / 8330 \text{ mm}^3 + 1480 \text{ kg} / 1105 \text{ mm}^2) \times 9.80665 = 108.8 \text{ N/mm}^2$$

$$\text{Safety factor } S = \sigma_B / \sigma_A = 569 \text{ N/mm}^2 / 108.8 \text{ N/mm}^2 = 5.23 > 5$$

2. Strength calculation of cross section B-B:

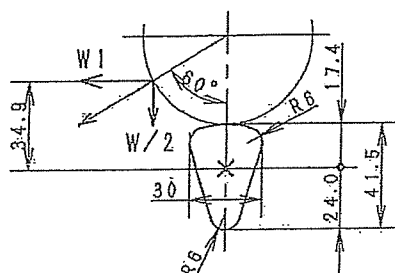

Sectional area: $A = 845 \text{ mm}^2$
 Section modulus: $Z_{\text{maximum}} = 4040 \text{ mm}^3$
 Section modulus: $Z_{\text{tension}} = 5570 \text{ mm}^3$

Tensile stress σ_B of the section B-B is,

$$\sigma_B = (W_1 \times R_B / Z_B + W_1 / A_B) \times 9.80665$$

where, W_1 is Horizontal component due to rated load $(1480/2) \times \tan 60^\circ = 1282 \text{ kg}$

R_B is distance from load application line to centroid of section B-B 34.9 mm

A_B is sectional area section B-B

Z_B is section modulus on tension side of section B-B

845 mm²

5570 mm³

$$\sigma_B = (1282 \text{ kg} \times 34.9 \text{ mm} / 5570 \text{ mm}^3 + 1282 \text{ kg} / 845 \text{ mm}^2) \times 9.80665 = 93.7 \text{ N/mm}^2$$

$$\text{Safety factor } S = \sigma_B / \sigma_B = 569 \text{ N/mm}^2 / 93.7 \text{ N/mm}^2 = 6.07 > 5$$

In either case, safety factor is greater than 5.

MODEL: MC405C Fly Jib, LC785M-6, LC785M-8, LC1385M-8, MK1033CW-1, MC285C-2 Aux Winch



MAEDA SEISAKUSHO CO., LTD.

Drawing No.

584-4587200

Hook Structural Calculation Sheet

Cross section performance of risky cross section

$$I = \frac{(B+b)^2 + 2Bb}{36(B+b)} \cdot h^3$$

$$= \frac{(40+16)^2 + 2 \times 40 \times 16}{36(40+16)} \times 57^3$$

$$= 405660.9 \text{ (mm}^4\text{)}$$

$$e1 = \frac{1}{3} \times \frac{2B+b}{B+b} \cdot h$$

$$= \frac{1}{3} \times \frac{2 \times 40 + 16}{40 + 16} \times 57 = 33 \text{ (mm)}$$

$$e2 = h - e1 = 57 - 33 = 24 \text{ (mm)}$$

$$\sigma_A = \frac{W}{A} - \frac{W(a+e2)e1}{I}$$

$$= \left(\frac{3800}{1596} - \frac{3800 \times 64 \times 33}{405660.9} \right) \times 9.81$$

$$= -170.7 \text{ (N/mm}^2\text{)}$$

$$S = \sigma_0 / \sigma_A = 687 / 170.7 = 4.02$$

$$\sigma_B = \frac{W}{A} + \frac{W(a+e2)e2}{I}$$

$$= \left(\frac{3800}{1596} + \frac{3800 \times 64 \times 24}{405660.9} \right) \times 9.81$$


$$= 164.5 \text{ (N/mm}^2\text{)}$$

$$S = \sigma_0 / \sigma_B = 687 / 164.5 = 4.18$$

Material of hook: S45C

Tensile strength: $\sigma_0 = 687 \text{ (N/mm}^2\text{)}$

Yield strength : 490 (N/mm²)

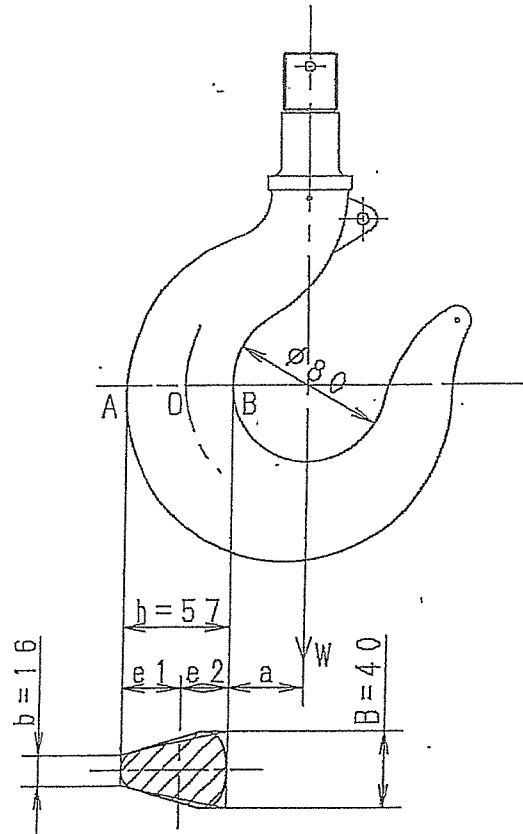

W: Rated load 3800 kg

A: Cross section area

$$A = \frac{B+b}{2} \times h$$

$$= \frac{40+16}{2} \times 57 = 1596 \text{ (mm}^2\text{)}$$

Hook Structural Calculation Sheet

MODEL MC-405C

Drawing No. 104-4561800

TESAC

ワイヤロープ証明書

CERTIFICATE FOR STEEL WIRE ROPE

No. 0066273

2015, 10, 19

TW0502485-1

株式会社テサックワイヤロープ

TESAC WIRE ROPE CO., LTD.

NISHIKINO HAMA MANUFACTORY

本ワイヤロープは下記規格により検査し本記載通りの検査成績であることを証明致します。

We hereby certify that this steel wire rope is examined and tested strictly according to the under-mentioned specification at our works and we guarantee the quality of the article.

適用規格 [SPECIFICATION]

TESAC SPEC.

製品番号 [PRODUCT NO.]

FZ10269-023

ロープの構成 [CONSTRUCTION]

IWRC 6 X WS (26)

0/0

ロープの径 [NOMINAL DIA. OF THE ROPE]..

8 (ACT. 8.26) mm

ロープの長さ [LENGTH]

92 m

種 別 [GRADE]

C

規定破断力 [SPECIFIED BREAKING LOAD]....

48.1 kN

実際破断力 [ACTUAL BREAKING LOAD]

48.9 kN

外 観 [APPEARANCE]

GOOD

素線試験 [WIRE TEST]

GOOD

備 考 [NOTE]

CONTINUOUS LENGTH

PRODUCT NO. LENGTH

FZ10269-024 92 m

FZ10269-025 92 m

FZ10269-026 92 m

FZ10269-027 92 m

FZ10269-028 92 m



部番: S104P214-3000-1

注番: X X 333703

INSPECTING SECTION

NIIGATA SEIKO CO., LTD.

NO.56, Nakakido, Higashi-ku, Niigata-shi, Niigata-ken 950-0886, Japan

新潟県新潟市東区中木戸 56 番地

新潟製綱株式会社

検査証明書 [CERTIFICATE OF INSPECTION]

日付 [Date] : August 20, 2015

顧客名 [To Messrs.] MAEDA SEISAKUSHO CO., LTD.

部 品 名 称 [Description] : Steel Wire Rope with Joint Clamp

部 品 番 号 [Type] : 104S92300000

数 量 [Quantity] : 9

機 種 名 [Model] : MC405C

ロット 番号 [Lot No.] : XX318686

ワイヤ ロープ [Steel Wire Rope]

ロープ 構成 [Construction] : IWRC 6xFi(29) Ungalv.

ロープ 撚 り [Lay] : Right Hand (Z) Ordinary Lay

規格破断荷重 [Minimum Breaking Load] : 43300 N

ロープ 径 [Norminal Dia.] : 8.0mm

部 品 寸 法 [Dimemsions of Description]

全 長 [Length] : 10955 ±10 mm

端 末 加 工 [Ends of Description]

端末金具材質 [Materials] : S45C


加 工 方 法 [Kind of Proccessing] : Swaging

保証締結荷重 [Minimum Proof Load] : 43300 N

破断試験結果 [Load at Breaking Test] : 55300 N

We hereby promise that the steel wire rope with joint clamp herein has been satisfactorily tested and inspected in accordance with the requirements of the above specification.

上記のジョイントクランプ加工品は、規格通りに検査に合格していることを証明致します。



Manager

○ NIIGATA SEIKO CO., LTD.

NO.56, Nakakido, Higashi-ku, Niigata-shi, Niigata-ken 950-0886, Japan

○ 新潟県新潟市東区中木戸 56 番地

新潟製綱株式会社

検査証明書 [CERTIFICATE OF INSPECTION]

日付 [Date] : August 20, 2015

顧客名 [To Messrs.] MAEDA SEISAKUSHO CO., LTD.

部 品 名 称 [Description] : Steel Wire Rope with Joint Clamp

部 品 番 号 [Type] : 104S9220000

数 量 [Quantity] : 9

機 種 名 [Model] : MC405C

ロット 番号 [Lot No.] : XX318685

ワイヤロープ [Steel Wire Rope]

ロープ 構成 [Construction] : IWRC 6xFi(29) Ungalv.

ロープ 撚り [Lay] : Right Hand (Z) Ordinary Lay

規格破断荷重 [Minimum Breaking Load] : 73500 N

ロープ 径 [Norminal Dia.] : 10.0mm

部 品 寸 法 [Dimemsiions of Description]

全 長 [Length] : 8010 ±10 mm

端 末 加 工 [Ends of Description]

端末金具材質 [Materials] : SCM415


加 工 方 法 [Kind of Proccessing] : Swaging

保証締結荷重 [Minimum Proof Load] : 73500 N

破断試験結果 [Load at Breaking Test] : 76900 N

We hereby promise that the steel wire rope with joint clamp herein has been satisfactorily tested and inspected in accordance with the requirements of the above specification.

上記のジョイントクランプ加工品は、規格通りに検査に合格していることを証明致します。



Manager

The maximum stress of the section A (dangerous section) as shown in Figure 1 is calculated by the following equation in JIS B2803 (1996), 'Hook'

$$\sigma_t = \frac{W}{A} + \frac{W \cdot R}{Z}$$

Where σ_t = tensile stress on Section A

W = working load limit

A = area of Section A

R = location of Section A

Z = section modulus of Section A

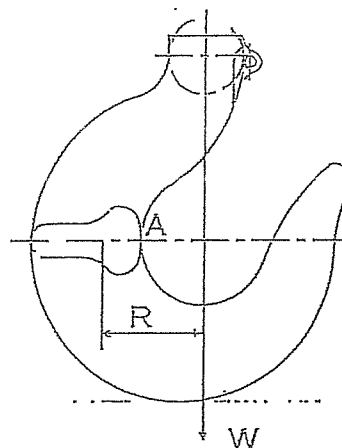


Figure1 Hook section A

JIS B 2803 stipulates that the working tensile stress σ_t shall not be more than one third of the ultimate material tensile stress:

$$\frac{\sigma_t}{\sigma_B} \leq \frac{1}{3}$$

σ_B : ultimate material tensile stress


The following table shows the results of safety factor calculations.

Table 1 Section A Safety Factor

Product Code	W (N)	A (mm ²)	R (mm)	Z (mm ³)	σ_t (N/mm ²)	σ_B (N/mm ²)	$\frac{\sigma_t}{\sigma_B}$
HTLD13	1.23×10^4	375	35.1	1.75×10^3	280	770	0.364

Although the calculation does not reach the requirement of the JIS, the hook has a good performance as a result of the breaking load test.

November 16, 2005



Masatoshi SASAKI

Manager of Technical Control Group

KITO Corporation

TEST CERTIFICATE OF KITO CHAIN SLINGS

Messrs.

Commodity: 1.25t Sling hook TL


Code No. : HTL013

Quantity: 1 Set(s)

Reference No. : —

1. Material: S45C


2. Dimensions and Strength

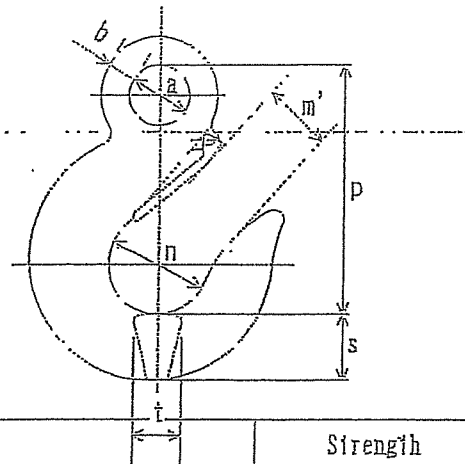

	Dimensions (mm)								Strength	
	p	a	b	n	m	m'	s	t	Breaking Load (kN)	Safety Factor
HTL005	84	20	7	35.5	25	22	17	12.1	≥25	≥5
HTL013	100	24	10	45	31	27	24.5	18	≥63	
HTL020	120	28	12.5	50	37	33	30	21.8	≥100	
HTL030	140	34	16	56	48	41	37.5	27.2	≥160	
HTL050	170	40	20	63	56	48	47.5	34.5	≥250	
HTL080	200	48	25	75	62	55	60	45	≥400	
HTL125	250	56	32	95	78	70	75	56	≥630	
Test Results	Good	Good	Good	Good	Good	Good	Good	Good	Good	Good

Safety Factor=Breaking Load/Working Load Limit

3. Appearance : Good

2000 Tsuijiarai, Showa-cho,
Nakakoma-gun, Yamanashi, JAPAN

K. Kishimoto

Kazutoshi Kishimoto

Manager of Quality Control Group



Environmental Data Sheet

Maker: Maeda Seisakusho Co., Ltd.	Machine Type: Mini Crawler Crane
Model: MC405CRME	Serial Number: E0443
Year of Manufacturing: 2016	

POWER SOURCE 1

Diesel ☒	Gasoline ☐	Electric ☒	
Maker: Yanmar	Model: 3TNV88-BPMB	Serial Number: U2901	
Year of Manufacturing: 2016	Power Output: 21.8kw	Displacement: 1.642L	Emission Level: US Tier2 (N/A for EU)
Pollution Index: CO 2.555g/kWh NOx+NMHC 5.714g/kWh PM 0.213g/kWh			
Fuel Type: Diesel	Av. Fuel Consumption: N/A 4.8L/H	Consumption at 50% Load: N/A	Consumption at 100% Load N/A 6.5L/H

POWER SOURCE 2

Electric ☒		
Maker: WEG	Model: W21 4P-7.5 kW	Serial Number 1029452475
Year of Manufacturing: 2016	Power Output: 7.5kw	

OIL, LUBRICATION, LIQUID

	Type	Volume, Liter	Change every	Quality	Biodegradable
Engine	Engine Oil	6.7	250	Mineral	No
Coolant	Water/AF	4.5	1000	Mineral	No
Slewing Gear	Gear Oil	0.6	1000	Mineral	No
Winch Gear	Gear Oil	0.5	1000	Mineral	No
Travel Gear	Gear Oil	1.0	1000	Mineral	No
Hydraulic system	Hyd Oil	75	1000	Mineral	No
Greases					

CRAWLERS

Maker: BRIDGESTONE	Model/Type: MAEDA MC405C spec	Crawler Size: 2100 x 320mm
HA oil tread: Yes	Zinc in tread: Yes	Cadmium in tread: No

SOUND POWER LEVEL dB (A)

	Minimum	Maximum
Measured		97
Guaranteed		101

PAINT, BATTERIES, RECYCLING

Percentage of water-based paint (%)	N/A
Percentage of solvent-based paint (%)	N/A
Quantity of Batteries	1
Type of Batteries	Lead acid
Quantity of marked plastic parts (%)	%
Percentage recyclable of machine weight	%